
PURO WALL-HUNG WASHBASIN

- elegant rectangular washbasin in a classically minimalist design
- reduced precise edges
- very generous interior dimensions
- clean and timeless lines-immortalised in long-lasting KALDEWEI steel enamel
- harmonises perfectly with the PURO bathtub series
- designed by Anke Salomon

Similar illustration



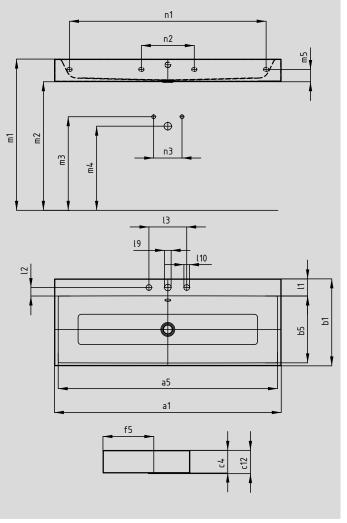

External length a₁ 1200 mm Internal length a₅ 1160 mm External width b₁ 460 mm Internal width b₂ 354 mm Height of rim c₄ 120 mm Distance basin surface to bottom edge of waste hole c₂ 125 mm Distance outer edge to centre of waste hole f₂ 267.5 mm Depth of tap deck l₁ 90.5 mm Distance tap holes to edge l₂ 45 mm Distance of tap holes l₂ 35 mm Diameter of coutside tap holes (3 tap holes only) l₃ 30 mm Distance FF*1 to to edge of basin surface m₁ 820-850 mm Distance FF*1 to bottom edge (washbasin) m₂ 700-730 mm Distance FF*1 to centre of water inlet m₂ 570-600 mm Distance FF*1 to centre of water inlet m₂ 570-600 mm Distance FF*1 to centre of fixing holes n₂ 570-600 mm Distance of fixing holes n₂ 570-600 mm Distance of fixing holes n₂ 570-600 mm Distance of f			
Internal length a5 1160 mm External width b1 460 mm Internal width b5 354 mm Height of rim c4 120 mm Distance basin surface to bottom edge of waste hole C12 125 mm Distance outer edge to centre of waste hole f5 267.5 mm Depth of tap deck l1 90.5 mm Distance tap holes to edge l2 45 mm Distance of tap holes l3 200 mm Diameter of centre tap hole (3 tap holes only) l0 35 mm Distance FF**1 to pedge of basin surface m1 820-850 mm Distance FF**1 to centre of water inlet m3 570-600 mm Distance FF**1 to centre of water inlet m3 570-600 mm Distance bottom edge (washbasin) m4 520-580 mm Distance bottom edge to centre of fixing hole m6 50-580 mm Distance bottom edge to centre of fixing hole m1 520-580 mm Distance of fixing holes m2 65 mm Distance of fixing holes m3 60-80 mm	Model No.		3167
External width b ₁ 460 mm Internal width b ₅ 354 mm Height of rim c ₄ 120 mm Distance basin surface to bottom edge of waste hole c ₁₂ 125 mm Distance outer edge to centre of waste hole f ₅ 267,5 mm Depth of tap deck l ₁ 90,5 mm Distance tap holes to edge l ₂ 45 mm Distance tap holes to edge l ₃ 35 mm Diameter of centre tap hole l ₉ 35 mm Diameter of outside tap holes (3 tap holes only) l ₁₀ 30 mm Distance FF**1 to pe dge of basin surface m ₁ 820 -850 mm Distance FF**1 to centre of water inlet m ₃ 570 -600 mm Distance FF**1 to centre of water inlet m ₃ 570 -600 mm Distance FF**1 to centre of fixing hole m ₅ 50 mm Distance of fixing holes n ₁ 200 mm Distance fF**1 to centre of drain hole wall connection m ₄ 50 -580 mm Distance pottom edge to centre of fixing holes n ₁ 50 mm Distance pottom edge to centre of	External length	$a_{\scriptscriptstyle 1}$	1200 mm
Internal width bs 5 354 mm Height of rim c 4 120 mm Distance basin surface to bottom edge of waste hole c 12 125 mm Distance outer edge to centre of waste hole f 5 126 mm Distance tap holes to edge location edge of waste hole l 2 12 12 12 12 12 12 12 12 12 12 12 12 1	Internal length	a ₅	1160 mm
Height of rim C C C C C C C C C C C C C C C C C C C	External width	b_1	460 mm
Distance basin surface to bottom edge of waste hole C12 Distance outer edge to centre of waste hole Distance outer edge to centre of waste hole L2 Distance tap holes to edge L2 Distance of tap holes Distance of tixing holes Distance of fixing holes Distance hot/cold water inlet Dista	Internal width	b ₅	354 mm
Distance outer edge to centre of waste hole fs 267.5 mm Depth of tap deck l ₁ Distance tap holes to edge l ₂ Distance of tap holes Distance of tap ho	Height of rim	C_4	120 mm
Depth of tap deckIs90,5 mmDistance tap holes to edgeIs45 mmDistance of tap holesIs200 mmDiameter of centre tap holeIs35 mmDiameter of outside tap holes (3 tap holes only)Is30 mmDistance FF*1 to top edge of basin surfacems820 -850 mmDistance FF*1 to bottom edge (washbasin)ms700 -730 mmDistance FF*1 to centre of water inletms570 -600 mmDistance FF*1 to centre of drain hole wall connectionms520 -580 mmDistance bottom edge to centre of fixing holesns65 mmOuter distance of fixing holesns1040 mmInner distance of fixing holesns280 mmDistance hot/cold water inletns80 -150 mm	Distance basin surface to bottom edge of waste hole	C ₁₂	125 mm
Distance tap holes to edge	Distance outer edge to centre of waste hole	f_5	267,5 mm
Distance of tap holes l ₃ Diameter of centre tap hole l ₉ Diameter of outside tap holes (3 tap holes only) l ₁₀ Distance FF*¹ to top edge of basin surface m ₁ Distance FF*¹ to bottom edge (washbasin) m ₂ Distance FF*¹ to centre of water inlet m ₃ Distance FF*¹ to centre of drain hole wall connection m ₄ Distance bottom edge to centre of fixing hole m ₅ Distance of fixing holes n ₁ Distance of fixing holes n ₂ Distance hot/cold water inlet n ₃ Distance hot/cold water inlet n ₄ Distance hot/cold water inlet n ₅ Distance hot/cold water inlet n ₆ Distance hot/cold water inlet n ₇ Distance hot/cold water inlet n ₈ Distance hot/cold water inlet	Depth of tap deck	l_1	90,5 mm
Diameter of centre tap hole Independent In	Distance tap holes to edge	I_2	45 mm
Diameter of outside tap holes (3 tap holes only) I_{10} Distance FF*1 to top edge of basin surface m_1 Distance FF*1 to bottom edge (washbasin) m_2 Distance FF*1 to centre of water inlet m_3 Distance FF*1 to centre of drain hole wall connection m_4 Distance bottom edge to centre of fixing hole m_5 Outer distance of fixing holes m_1 Inner distance of fixing holes m_2 Distance hot/cold water inlet m_3 m_5 m_5 m_7 m_8 m_8 m_9 $m_$	Distance of tap holes	l ₃	200 mm
Distance FF*1 to top edge of basin surface m ₁ 820-850 mm Distance FF*1 to bottom edge (washbasin) m ₂ 700-730 mm Distance FF*1 to centre of water inlet m ₃ 570-600 mm Distance FF*1 to centre of drain hole wall connection m ₄ 520-580 mm Distance bottom edge to centre of fixing hole m ₅ 65 mm Outer distance of fixing holes n ₁ 1040 mm Inner distance of fixing holes n ₂ 280 mm Distance hot/cold water inlet n ₃ 80-150 mm	Diameter of centre tap hole	l ₉	35 mm
Distance FF*1 to bottom edge (washbasin) m ₂ 700 - 730 mm Distance FF*1 to centre of water inlet m ₃ 570 - 600 mm Distance FF*1 to centre of drain hole wall connection m ₄ 520 - 580 mm Distance bottom edge to centre of fixing hole m ₅ 65 mm Outer distance of fixing holes n ₁ 1040 mm Inner distance of fixing holes n ₂ 280 mm Distance hot/cold water inlet n ₃ 80 - 150 mm	Diameter of outside tap holes (3 tap holes only)	I ₁₀	30 mm
Distance FF*1 to centre of water inlet m_3 570 - 600 mm Distance FF*1 to centre of drain hole wall connection m_4 520 - 580 mm Distance bottom edge to centre of fixing hole m_5 65 mm Outer distance of fixing holes n_1 1040 mm Inner distance of fixing holes n_2 280 mm Distance hot/cold water inlet n_3 80 - 150 mm	Distance FF*1 to top edge of basin surface	m_1	820 - 850 mm
Distance FF*1 to centre of drain hole wall connection m_4 520 - 580 mm Distance bottom edge to centre of fixing hole m_5 65 mm Outer distance of fixing holes n_1 1040 mm Inner distance of fixing holes n_2 280 mm Distance hot/cold water inlet n_3 80 - 150 mm	Distance FF*1 to bottom edge (washbasin)	m ₂	700 - 730 mm
Distance bottom edge to centre of fixing hole m_5 65 mm Outer distance of fixing holes n_1 1040 mm Inner distance of fixing holes n_2 280 mm Distance hot/cold water inlet n_3 80 - 150 mm	Distance FF*1 to centre of water inlet	m ₃	570 - 600 mm
Outer distance of fixing holes n_1 1040 mm Inner distance of fixing holes n_2 280 mm Distance hot/cold water inlet n_3 80 - 150 mm	Distance FF*1 to centre of drain hole wall connection	m_4	520 - 580 mm
Inner distance of fixing holes n_2 280 mm Distance hot/cold water inlet n_3 80 - 150 mm	Distance bottom edge to centre of fixing hole	m ₅	65 mm
Distance hot/cold water inlet n ₃ 80 - 150 mm	Outer distance of fixing holes	n ₁	1040 mm
	Inner distance of fixing holes	n ₂	280 mm
	Distance hot/cold water inlet	n ₃	80 - 150 mm
Weight of the enamelled washbasin in kg 22,8	Weight of the enamelled washbasin in kg		22,8