

## CONOFLAT

- straightlined, purist design
- high level of comfort thanks to the flat enamelled waste cover that is flush with the shower area
- can be installed to be absolutely flush with the floor
- made of KALDEWEI steel enamel 3,5 mm
- ideally complements the CONODUO bath
- designed by Sottsass Associati
- drainage capacity KA 120: 0,85 l/s
- drainage capacity KA 120 vertical: 1,4 l/s



Similar illustration

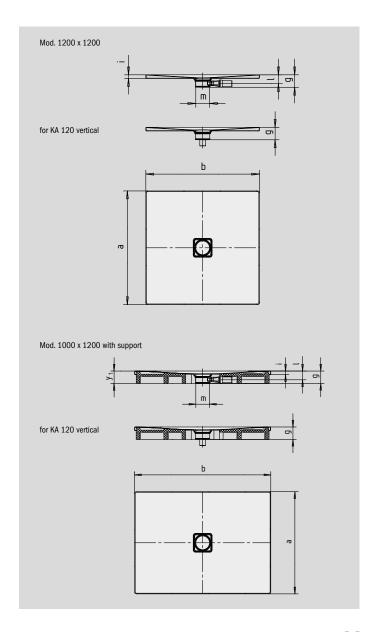

SECURE<sup>[+]</sup>

| Model No.                                 |       | 856        | 857        | 858        | 859        | 860        | 861           |
|---|-------|------------|------------|------------|------------|------------|---------------|
| External length                           | a     | 900        | 1000       | 750        | 800        | 900        | 1000 mm       |
| External width                            | b     | 1500       | 1500       | 1600       | 1600       | 1600       | 1600 mm       |
| Height with siphon                        | g     | 107        | 107        | 107        | 107        | 107        | 107 mm        |
| Height of rim                             | i     | 32         | 32         | 32         | 32         | 32         | 32 mm         |
| Diameter of drain hole                    | m     | 120        | 120        | 120        | 120        | 120        | 120 mm        |
| Siphon connection height                  | T     | 76         | 76         | 76         | 76         | 76         | 76 mm         |
| Height with support                       | $y_1$ | 110        | 110        | 110        | 110        | 110        | 110 mm        |
| Weight of the enamelled shower tray in kg |       | 35         | 38         | 30         | 35         | 37         | 41            |
| Anti-slip                                 |       | 492 x 492  | 588 x 588  | 492 x 492  | 492 x 492  | 492 x 492  | 588 x 588 mm  |
| Full anti-slip                            |       | 836 x 1412 | 932 x 1412 | 692 x 1556 | 740 x 1556 | 836 x 1556 | 932 x 1556 mm |



The TÜV Rheinland confirms the following properties of KALDEWEI's anti-slip and full anti-slip finish:

- Assessment group **B** for wet barefoot areas (**DIN 51097**)
- Assessment group R 10 for slip-resistant properties in work rooms and areas with an increased risk of slipping (DIN 51130)

All CONOFLAT models are available with  ${\it full\ anti-slip}$  finish.

